



LOOSE WATER HAMMER ARRESTERS

Loose Water Hammer Arresters

FDA/NSF Approved Materials:

- Acetal outer shell and piston
- Buna N O-rings
- FDA approved silicone lubrication

Working Parameters:

- Max Working Temp: 180°
- Max Working Pressure: 170 PSIG
- Burst Tested to up to: 1,200 PSIG

Installation:

- Arrester may be installed at any angle
- All AA45 models are approved for in-wall installations
- No access panel is required
- Use pipe dope only on 1/2" MIP


Listings:

- IAPMO-Uniform Plumbing Code
- ASSE: ANSI/ASSE 1010 2004
- NSF 61
- Meets all low lead requirements

Attachments:

- Permanent Factory Seal.

MIP CPVC PEX UPONOR 3/8 Cop Tee Pex Tee

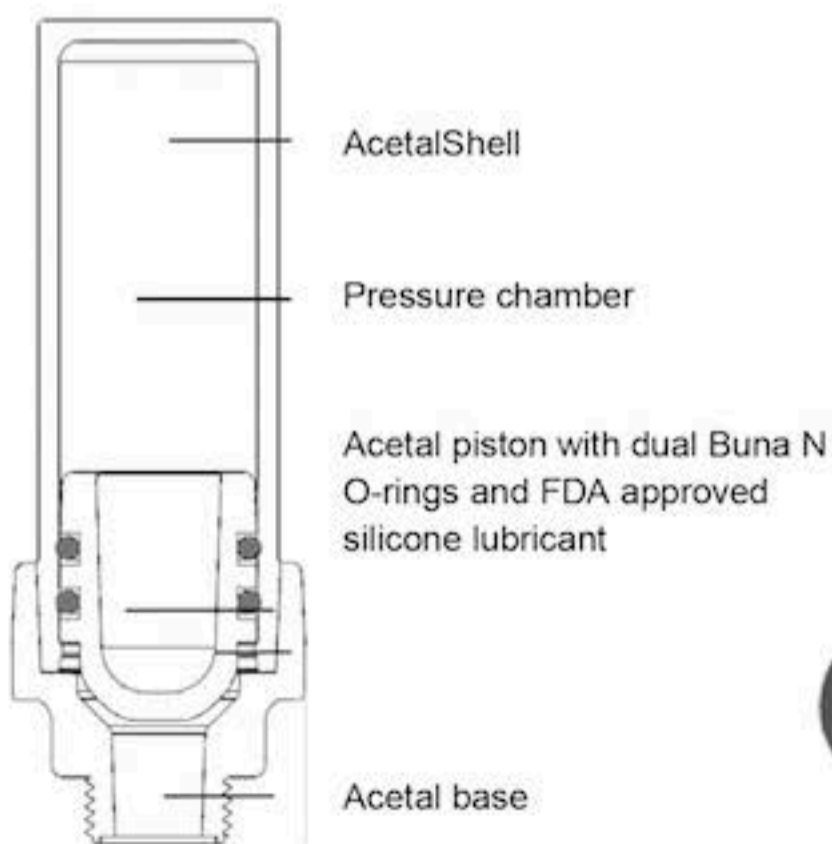

Loose Arresters	Connection
JBSAA45-MIP	1/2" MIP
JBSAA45 -CPM	1/2" CPVC
JBSAA45-PEX	1/2" Brass Pex Barb
JBSAA45-UPW	UPONOR/Wirsbo
JBSAA45-DCT	Dish Washer Connection 3/8" Comp
JBSAA45-PEX-TEE	1/2" Pex Tee



Patent(s) Pendine

By Ayrlett



6851 Enterprise Drive,
South Bend, IN 46628

Phone: 574-288-0607
Toll-free: 800-527-8727

Web: www.jb-products.com
Email: info@jb-products.com